ALTV2416300ULM, ALTV2416300ULCBM
UL Listed AC CCTV Power Supply

Rev. DSALTV2416300ULM - K20H

Overview

These Altronix AC Wall Mount CCTV Power Supplies provide 24VAC or 28VAC distributed via sixteen (16) fuse or PTC protected power limited outputs for powering CCTV Cameras, heaters and other video accessories.

Specifications

- Input 115VAC, 50/60Hz, 2.7 amp.
- 24VAC @ 12.5 amp (300VA) or 28VAC @ 10 amp (280VA) supply current.
- Illuminated power disconnect circuit breaker with manual reset.
- Surge suppression.
- AC power LED.
- Spare fuse(s) provided (all models w/primary and/or secondary fuses).
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.

Models

ALTV2416300ULM
- Sixteen (16) fuse protected outputs.
- Outputs are rated @ 3.5 amp.

ALTV2416300ULM3
ALTV2416300ULM w/3-wire Line Cord.

ALTV2416300ULCBM
- Sixteen (16) Class 2 Rated PTC protected power limited outputs.
- Outputs are rated @ 2.5 amp.

ALTV2416300ULCBM3
ALTV2416300ULCBM w/3-wire Line Cord.

Agency Approvals

UL Listed for Commercial CCTV Equipment (UL 2044).

CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.

European Conformity

Enclosure Dimensions

8.5"H x 7.5"W x 3.75"D

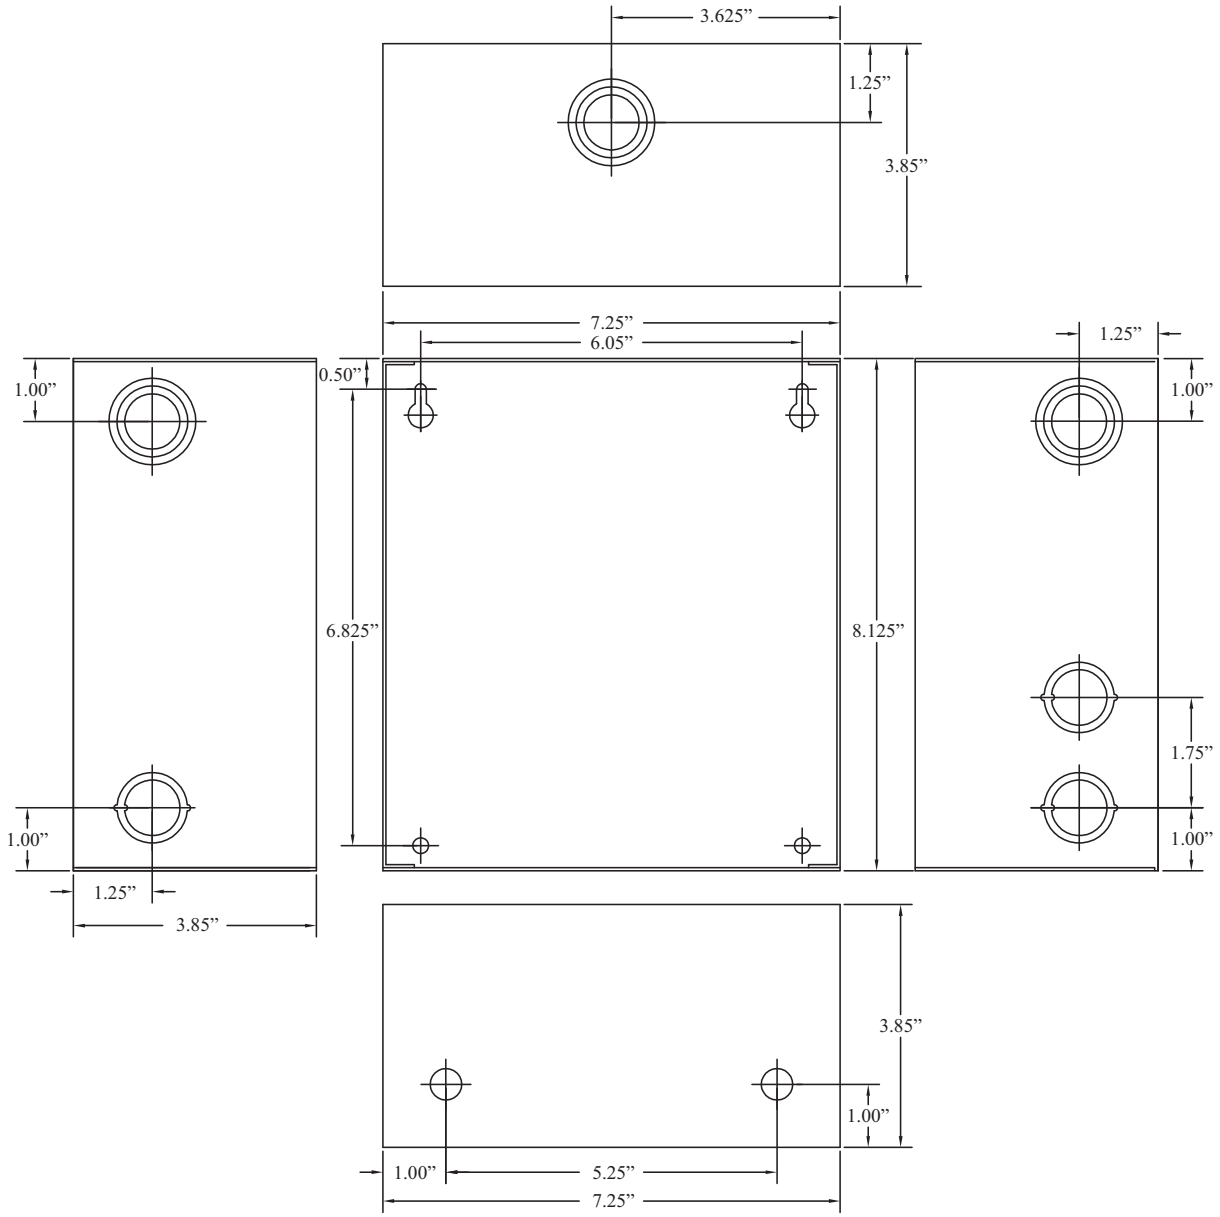

Shipping Weights (approximate):

- ALTV2416300ULM: 14.2 lbs.
- ALTV2416300ULCBM: 14.2 lbs.
- ALTV2416300ULM3: 14.5 lbs.
- ALTV2416300ULCBM3: 14.5 lbs.